

Model 900Q 3/4" Quick Opening Valve Set With Ball Checks

300 WSP @ 450 ° F Max

600 WOG


100% Pressure Tested

ASME Compliant per B31.1 and Section One, PG 60


Appendix A18 of ASME Boiler Code.

Complete Installation Instructions Are Included With Each Set


Contains Lead. Not For Use in Potable Water Systems

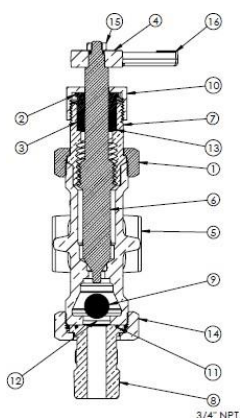


UPPER VALVE

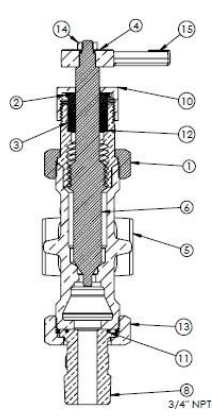


LOWER VALVE




UPPER VALVE LEVER




LOWER VALVE LEVER



SECTION B-B
SCALE 1 : 2



SPECIAL DRAIN FITTING



BALL VALVE 300 WSP

MATERIAL LIST							
PART NO.	DESCRIPTION	MATERIAL	QUANTITY	PART NO.	DESCRIPTION	MATERIAL	QUANTITY
1	UNION NUT	ASTM B61	1	11	O-RING	TFE/P	1
2	PACKING GLAND	ASTM B16	1	12	PACKING WASHER	300 STAINLESS	1
3	PACKING	33 NAFG	1	13	UNION NUT	ASTM B61	1
4	MARKER DISC	300 STAINLESS	1	14	JAM NUT	ASTM B19	1
5	BODY	ASTM B61	1	15	TEE HANDLE	ASTM B62	1
6	STEM	ASTM B21	1	16	CLEVIS PIN	300 STAINLESS	1
7	BONNET	ASTM B61	1	17	EQUALIZE	CARBON STEEL	1
8	3/4" UNION TAIL PIECE	ASTM B16	1	18	COTTER PIN	300 STAINLESS	1
9	BALL CHECK	302 STAINLESS	1	19	SPECIAL DRAIN FITTING	ASTM B16	1
10	PACKING NUTQ	ASTM B16	1	20	BALL VALVE 300 WSP	ASTM B61	1